

# FLOOD LIGHTS, DOCKING LIGHTS, SPOT LIGHTS, UNDERWATER LIGHTS

## SERIES 80



### Sylt Deck Downlight

#### Application


Multipurpose light can be used as a sailboat spreader light, deck light, or spotlight on board where space is a minimum.

#### Housing

High quality polycarbonate, black or white. Shock-resistant, shock-proof, non-corrosive, non-magnetic and seawater resistant.

#### Mounting

Wing mounts for flexible mounting anywhere from masts to companion ways. Flexible mast mount.

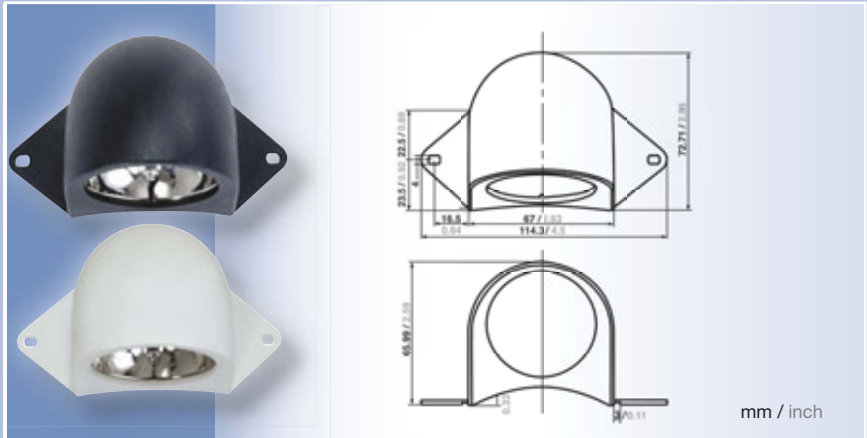

Including illuminant						
Article number		Description	Wattage	Housing color	Voltage	Item weight
3144047		deck light	20 W	black	12 V	68 g
3144037		deck light	20 W	white	12 V	68 g
Sparepart / Extra						
90470		bulb BA 9s Halogen	20 W		12 V	



### Kiel Deck Floodlights in High Quality Polycarbonate

#### Application


High output fixture will mount to masts where maximum light output is required.

#### Housing

Black or white polycarbonate, shock-resistant, non-corrosive, non-magnetic, seawater resistant.

#### Electric

Cable max. dia.7 mm / 0.28"

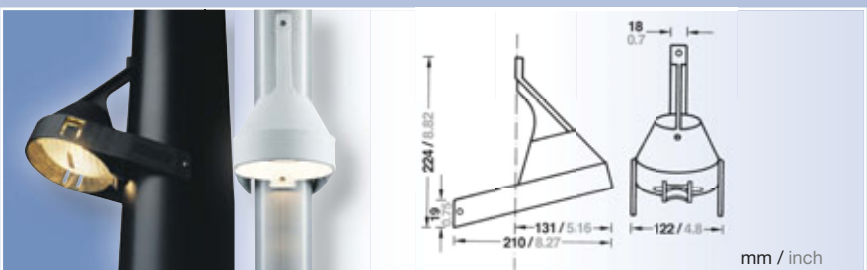

Including illuminant						
Article number		Description	Wattage	Housing color	Voltage	Item weight
3144001		deck light	35 W	black	12 V	450 g
3144003		deck light	50 W	black	12 V	450 g
3144004		deck light	35 W	white	12 V	450 g
3144006		deck light	50 W	white	12 V	450 g
3144005		deck light	50 W	white	24 V	450 g
Sparepart / Extra						
GE 4406		bulb	35 W		12 V	
GE 7606		bulb	50 W		12 V	
GE 4593		bulb	50 W		24 V	



## SERIES 80




mm / inch

### Including illuminant

Article number	Description	Wattage	Housing color	Voltage	Item weight
80500	spreader light	50 W	black	12 V	450 g
80501	spreader light	50 W	white	12 V	450 g
3134113	spreader light	50 W	black	24 V	450 g
3134133	spreader light	50 W	white	24 V	450 g

### Sparepart / Extra

GE H7606	 GE bulb (contact GE supplier)	50 W		12 V	
GE 4593	 GE bulb (contact GE supplier)	50 W		24 V	
80901	stainless steel bracket				

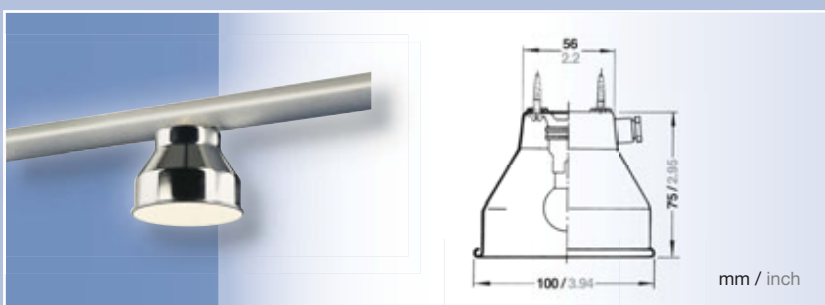

mm / inch

### Not including illuminant

Article number	Description	Wattage	Housing color	Voltage	Item weight
3102001	spreader light	25 W	stainless steel	12 V; 24 V	150 g

### Sparepart / Extra

90049	 bulb BA 15D	25 W		12 V	
90052	 bulb BA 15D	25 W		24 V	



### Hamburg High Output Floodlight

#### Application

Can be used in any location where maximum light output is required on deck. Can be used on sailboats as well as powerboats.

#### Housing

Constructed of high quality black or white polycarbonate, shock-resistant, non-corrosive, non-magnetic, water-tight, seawater resistant.

#### Mounting

Stainless steel angle bracket (\* Extras). direct on spreader; wall or mast mount possible with stainless steel angle bracket (extra).



### Rostock High Quality Polished Spreader Light Used in Visible Locations Around the Boat

#### Application

Can be used on sailboats and powerboats.

#### Housing


Durable stainless steel, non-magnetic, seawater resistant.

#### Electric

Cable entry PG 7.

# FLOOD LIGHTS, DOCKING LIGHTS, SPOT LIGHTS, UNDERWATER LIGHTS

## SERIES 80



### Bremen Watertight Portable Searchlight with Optional Morse Capability

#### Application

This light is the only SOLAS approved searchlight in the world. Used by coast guard and military all around the world. Highly flexible and useful tool. Can be used inside and outside the boat.

#### Housing

Black elastic rubber, shock-resistant, non-corrosive, non-magnetic, under water. Aqua Signal 5-pin waterproof connectors are suggested for attachment and termination points around the boat. 10' pigtail cable.

#### Optics

Built-in sealed beam.

#### Mounting

Mounting brackets available as extra.



#### Protection

IP 68



Including illuminant					
Article number	Description	Wattage	Housing color	Voltage	Item weight
80600	portable searchlight	50 W	black	12 V	750 g
3313003	portable searchlight	50 W	black	24 V	750 g

#### Spare Parts / \*Extras

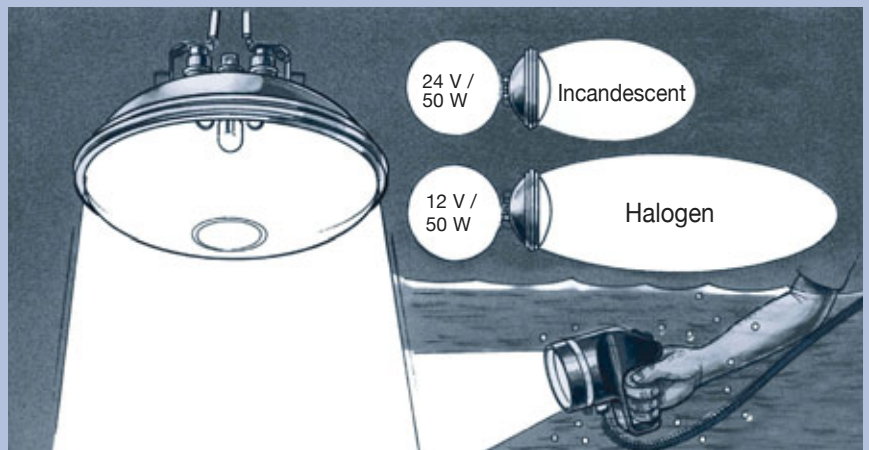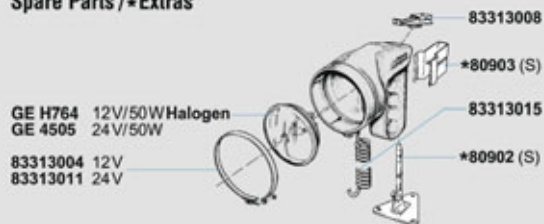



## SERIES 1076



### Island Stainless Steel Halogen Floodlight

#### Application

Utilizes technology from our commercial line of floodlights which have become the industry standard worldwide. Flexible wiring capability allows for AC and DC voltage installations.

#### Housing


Powder coated white, non-corrosive, non-magnetic, seawater resistant.

#### Optics

Clear safety glass.

#### Protection

IP 67

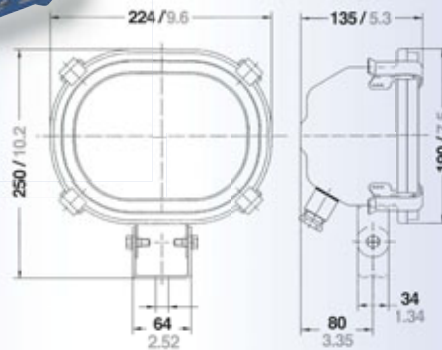

mm / inch


Not including illuminant

Article number	Description	Wattage	Housing color	Voltage	Item weight
1076060	halogen floodlight	100 W; 200 W	white painted	12 V; 24 V; 110 V; 220 V	2,585 g

Sparepart / Extra

98400483	frame for floodlight				
----------	----------------------	--	--	--	--

#### Spare Parts / \*Extras

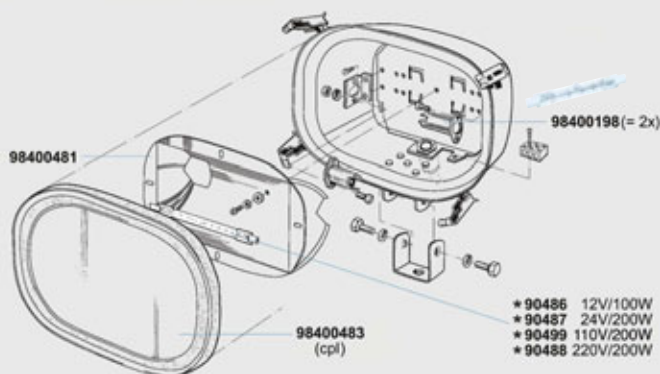



## SERIES 80



Including illuminant					
Article number	Description	Wattage	Housing color	Voltage	Item weight
80400	floodlight Lübeck	50 W (Halogen)	stainless steel	12 V	748 g
80420	floodlight Lübeck	50 W	stainless steel	24 V	748 g
Sparepart / Extra					
GE 4593	GE bulb (contact GE supplier)	50 W		24 V	
GE H7606	GE bulb (contact GE supplier)	50 W		12 V	



CE

**NEW!**

### Lübeck Stainless Steel Floodlight with Flexible Mounting for Individual Usage Through Adjustable Brackets

#### Application

Utilizes technology from our commercial line of floodlights into this compact, high quality fixture.

#### Housing

Stainless steel polished, watertight, shock resistant, non-corrosive, non-magnetic, seawater resistant.

#### Mounting

Adjustable bracket with central mounting hole  $\varnothing 7 \text{ mm} / 0.28 \text{ inch}$

# FLOOD LIGHTS, DOCKING LIGHTS, SPOT LIGHTS, UNDERWATER LIGHTS

## SERIES 1024

**NEW!**

### Commercial Grade Watertight Multipurpose Luminaire

#### Application

Handy dimensions offer optimized use on board, e.g. workshops, engine rooms, stores, holds and passage ways.

#### Protection


IP 67

#### Mounting

2 mounting holes, Ø 10 mm / 0.39 inch

#### Electric

Flexible wiring, heat resistant up to 105°C / 221°F

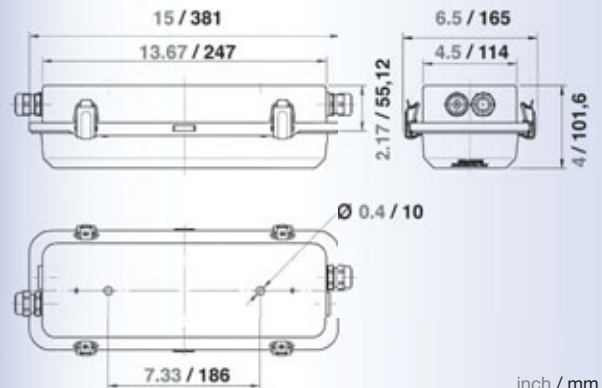

inch / mm

Not including bulbs (2 per fixtures)

Article number	Description	Wattage	Housing color	Voltage	Item weight
10242	watertight multipurpose luminaire, surface	2 x 8 W	powder coated white RAL 9016	12 V DC	1,746 g
10244	watertight multipurpose luminaire, surface	2 x 8 W	powder coated white RAL 9016	24 V DC	1,746 g
<b>Sparepart / Extra</b>					
98401353	diffuser				
98401585	socket G5				
91024	T16 Fluorescent lamp	8 W			